

SEATWAY TP SYSTEM – available in multiple variations

Hussey Seatway TP, theatre quality retractable platforms have been developed in the UK specifically for use in theatres and performing arts facilities where a stiffer, more solid feel to the structure is required. The platforms can accommodate our comprehensive range of bench and chair models providing a fully integrated solution. The TP platform systems can be opened and closed manually or by integral power that enables the transformation of empty halls to seated performance venues within minutes.

APPLICATIONS

Seatway TP retractable seating is suitable for a range of applications the require both seated audiences and multi-purpose floor space.

FEATURES

- Distinctive fully welded platform design
- Adjustable cantilevers on every row to compensate for any floor deviances
- Parallel guidance system for straight line operation
- Stiff and dynamically correct under-structure with unique space frame construction methods
- Row to row, parallel and vertical, column interlock
- All metal work powder coated as standard
- Non marking polyurethane wheels

STANDARD DIMENSIONS

- Row Rise: $10\frac{1}{4}"$, $11"$, $11\frac{6}{8}"$ & $12"$
- Row Depth: $33\frac{1}{2}"$, $35\frac{1}{2}"$, $36"$ ($70\frac{6}{8}"$, double depth)
- Closed Depth = row depth + $12\frac{6}{8}"$
- Closed Height = (No of rows x Row Rise) + $7\frac{1}{2}"$

ACCESSORIES

- Front, side and rear safety rails
- Integral power or manual operation
- Fascia panel systems
- Aisle lighting
- Flex rows for wheelchair spaces
- Electronic partial opening feature

TECHNICAL

The Hussey Seatway TP system is designed to be customised and re-engineered easily, so please contact our technical department if these dimensions do not fit your requirement. For all technical details, please see the reverse side of this specification sheet. CAD drawings are available on request.



TP-F
Wall and floor attached

TP-R
Recessed into wall space

TP-M
Mobile Units for fully flexible positioning (can be moved on castors or air bearings)

TP-T
Travelling system (A complete block that can be powered into a new position)



husseyseatway
PUBLIC SEATING SYSTEMS



Hussey Seatway Ltd, 3 Centurion Way, Crusader Park, Warminster, Wiltshire, BA12 8BT U.K.

Tel: +44 (0)1985 847200 Fax: +44 (0)1985 847300 www.husseyseatway.com sales@husseyseatway.com

Dimension Guide	
RH	(number of rows x row rise) + 2100mm [7"]
UH	(number of rows x row rise) + 190mm [7 1/2"]
ED	(number of rows x row depth) + 325mm [1'-1"]
CD	Row depth + 325mm [1'-1"]
RD	* Custom row depths are available
RR	* Custom row rises are available

Standards & Codes

Strength & Stability

Hussey Seatway Chairs & Benches satisfy the requirements of BS EN 12727:2000.

Fire Retardancy


Hussey Seatway seating fabrics and foams comply with:
BS 5852:1990 (Source 0, 1, and 5).
BS 7176: 1995 (Direct Test).
BS EN 1021 - 1 & 2: 1994.
DIN standards & other European Standards can be satisfied as required.

Telescopic Platforms


Hussey Seatway TP's meet the requirements of BS EN 13200 - 5 'Telescopic Stands'.

Disability Provision

Hussey Seatway provide seating solutions that address the provisions of the Disability Discrimination Act (DDA 2005).

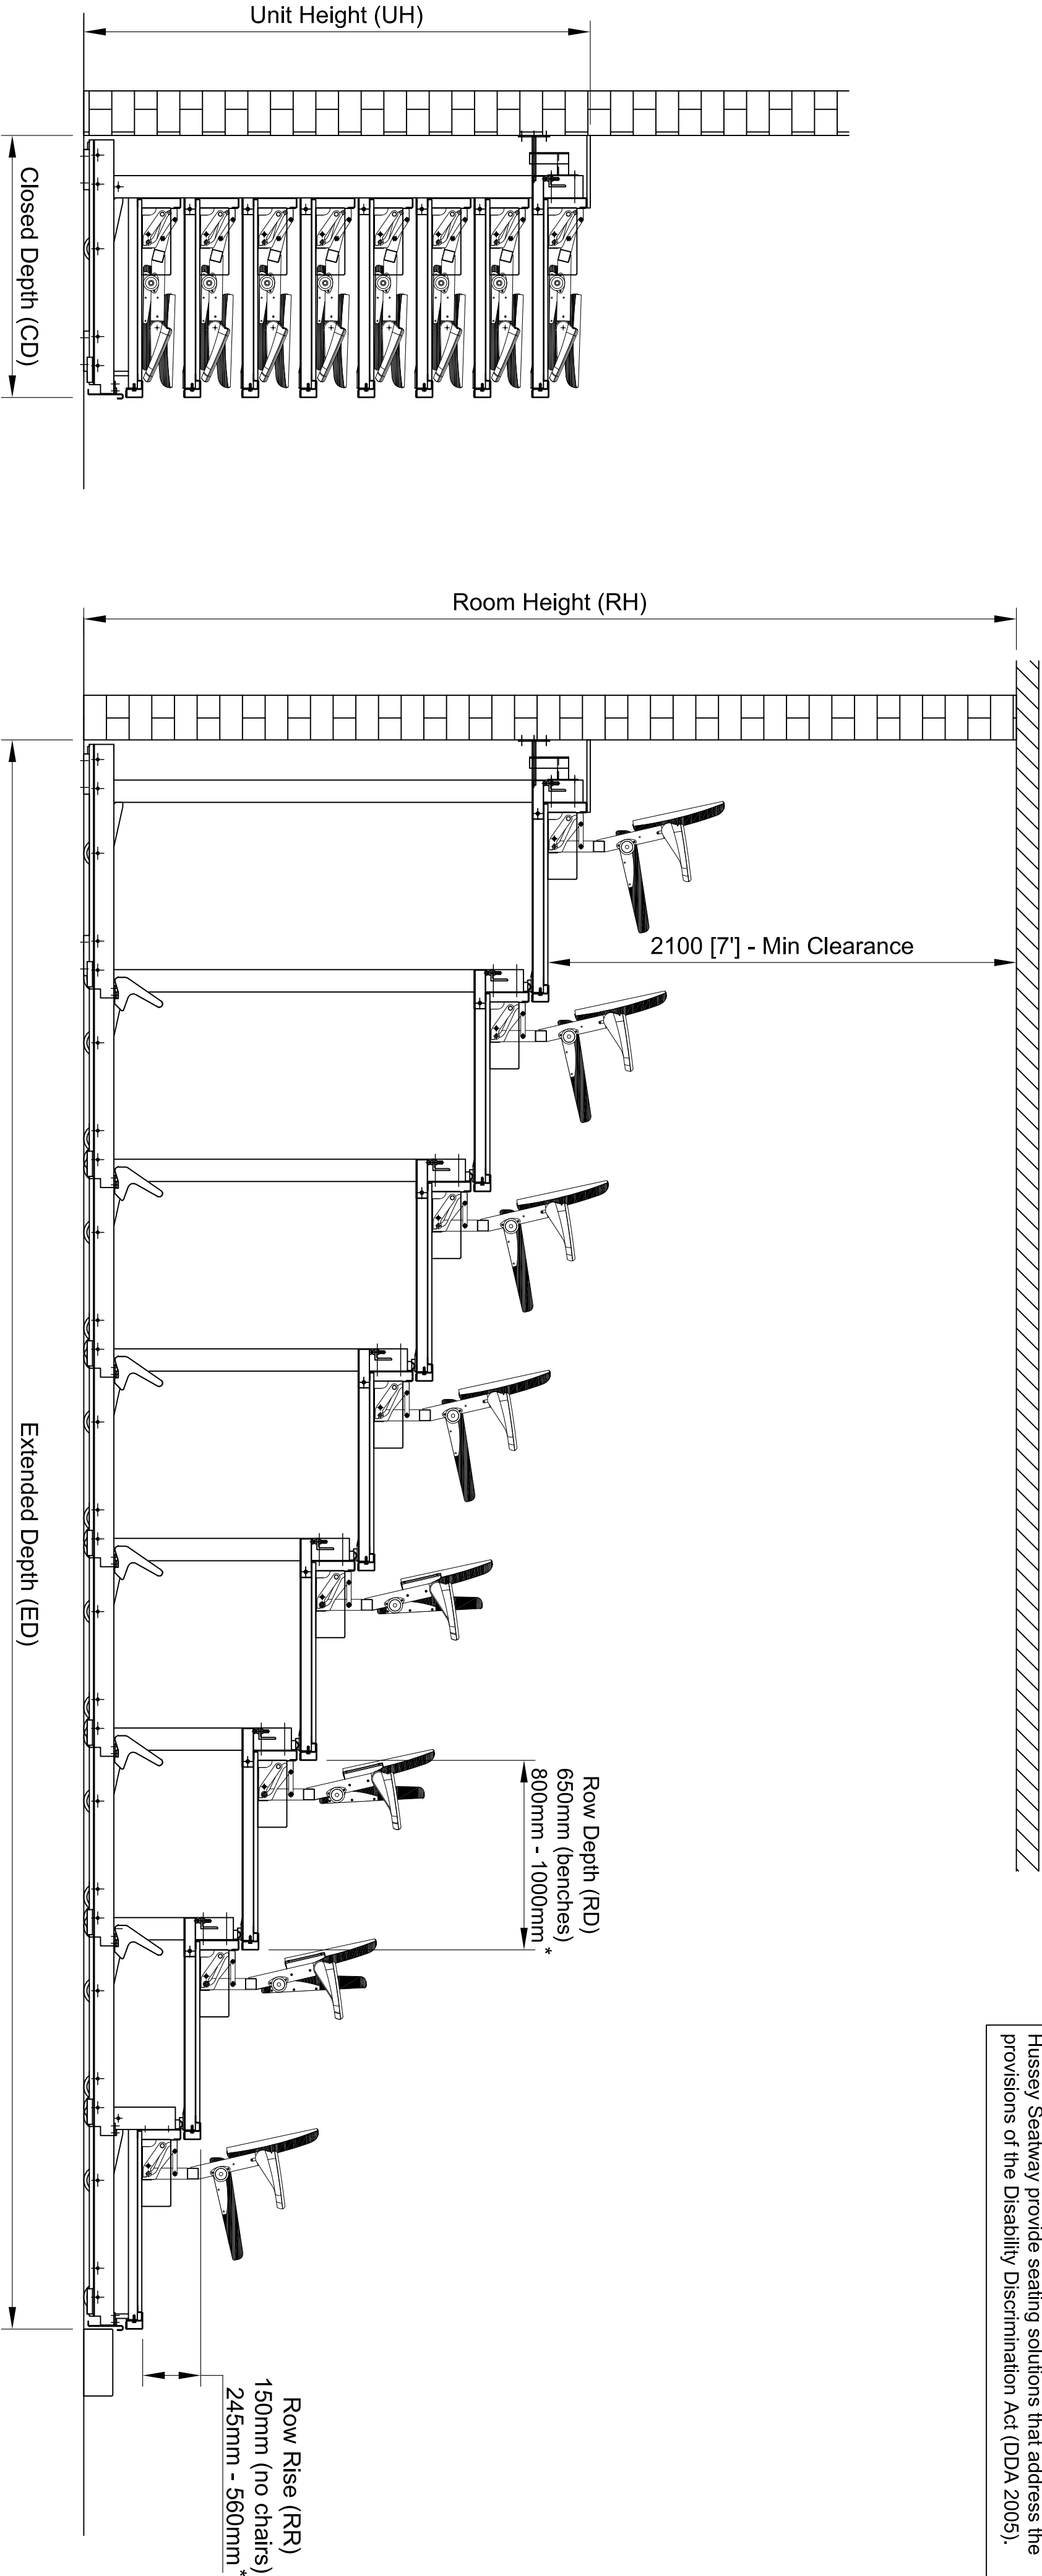

GENERAL
TOLERANCE
+ 1 mm
-



Husseyseatway
PUBLIC SEATING SYSTEMS

THIS DRAWING IS THE PROPERTY AND
COPYRIGHT OF HUSSEY SEATWAY LTD.
COPYING OR REPRODUCTION WITHOUT
WRITTEN PERMISSION IS PROHIBITED. © 2014

Tel: +44 (0)1985 847200
Fax: +44 (0)1985 847300
Email: info@husseyseatway.com

Itemref Quantity Title/Name, designation, material, dimension etc

TP Platforms

PRODUCT SPECIFICATION
LAYOUT

Imperial Version

A3 Scale
1:30

SEATWAY TP SYSTEM – available in multiple variations

Hussey Seatway TP, theatre quality retractable platforms have been developed in the UK specifically for use in theatres and performing arts facilities where a stiffer, more solid feel to the structure is required. The platforms can accommodate our comprehensive range of bench and chair models providing a fully integrated solution. The TP platform systems can be opened and closed manually or by integral power that enables the transformation of empty halls to seated performance venues within minutes.

APPLICATIONS

Seatway TP retractable seating is suitable for a range of applications the require both seated audiences and multi-purpose floor space.

FEATURES

- Distinctive fully welded platform design
- Adjustable cantilevers on every row to compensate for any floor deviances
- Parallel guidance system for straight line operation
- Stiff and dynamically correct under-structure with unique space frame construction methods
- Row to row, parallel and vertical, column interlock
- All metal work powder coated as standard
- Non marking polyurethane wheels

STANDARD DIMENSIONS

- Row Rise: 260,280, 300 & 320mm
- Row Depth: 850, 900, 915mm (1800mm double depth)
- Closed Depth = row depth + 325mm
- Closed Height = (No of rows x Row Rise) + 190mm

ACCESSORIES

- Front, side and rear safety rails
- Integral power or manual operation
- Fascia panel systems
- Aisle lighting
- Flex rows for wheelchair spaces
- Electronic partial opening feature

TECHNICAL

The Hussey Seatway TP system is designed to be customised and re-engineered easily, so please contact our technical department if these dimensions do not fit your requirement. For all technical details, please see the reverse side of this specification sheet. CAD drawings are available on request.



TP-F
Wall and floor attached

TP-R
Recessed into wall space

TP-M
Mobile Units for fully flexible positioning (can be moved on castors or air bearings)

TP-T
Travelling system (A complete block that can be powered into a new position)




 **husseyseatway**
PUBLIC SEATING SYSTEMS

Dimension Guide	
RH	(number of rows x row rise) + 2100mm
UH	(number of rows x row rise) + 190mm
ED	(number of rows x row depth) + 325mm
CD	Row depth + 325mm
RD	* Custom row depths are available
RR	* Custom row rises are available

Layout Criteria	
Seat Centres (W)	490mm with Armrests, 460mm without
Seat Height (H)	460mm - Gallery PC & Arts PC 420mm - Upholstered/Plastic Benches
Aisle Width (AW)	1100mm
Aisle Step Height	Half row rise

Standards & Codes	
Strength & Stability	Hussey Seatway Chairs & Benches satisfy the requirements of BS EN 12727:2000.
Fire Retardancy	Hussey Seatway seating fabrics and foams comply with: BS 5852:1990 (Source 0, 1, and 5). BS 7176: 1995 (Direct Test). BS EN 1021 - 1 & 2: 1994. DIN standards & other European Standards can be satisfied as required.
Telescopic Platforms	Hussey Seatway TP's meet the requirements of BS EN 13200 - 5 'Telescopic Stands'.
Disability Provision	Hussey Seatway provide seating solutions that address the provisions of the Disability Discrimination Act (DDA 2005).

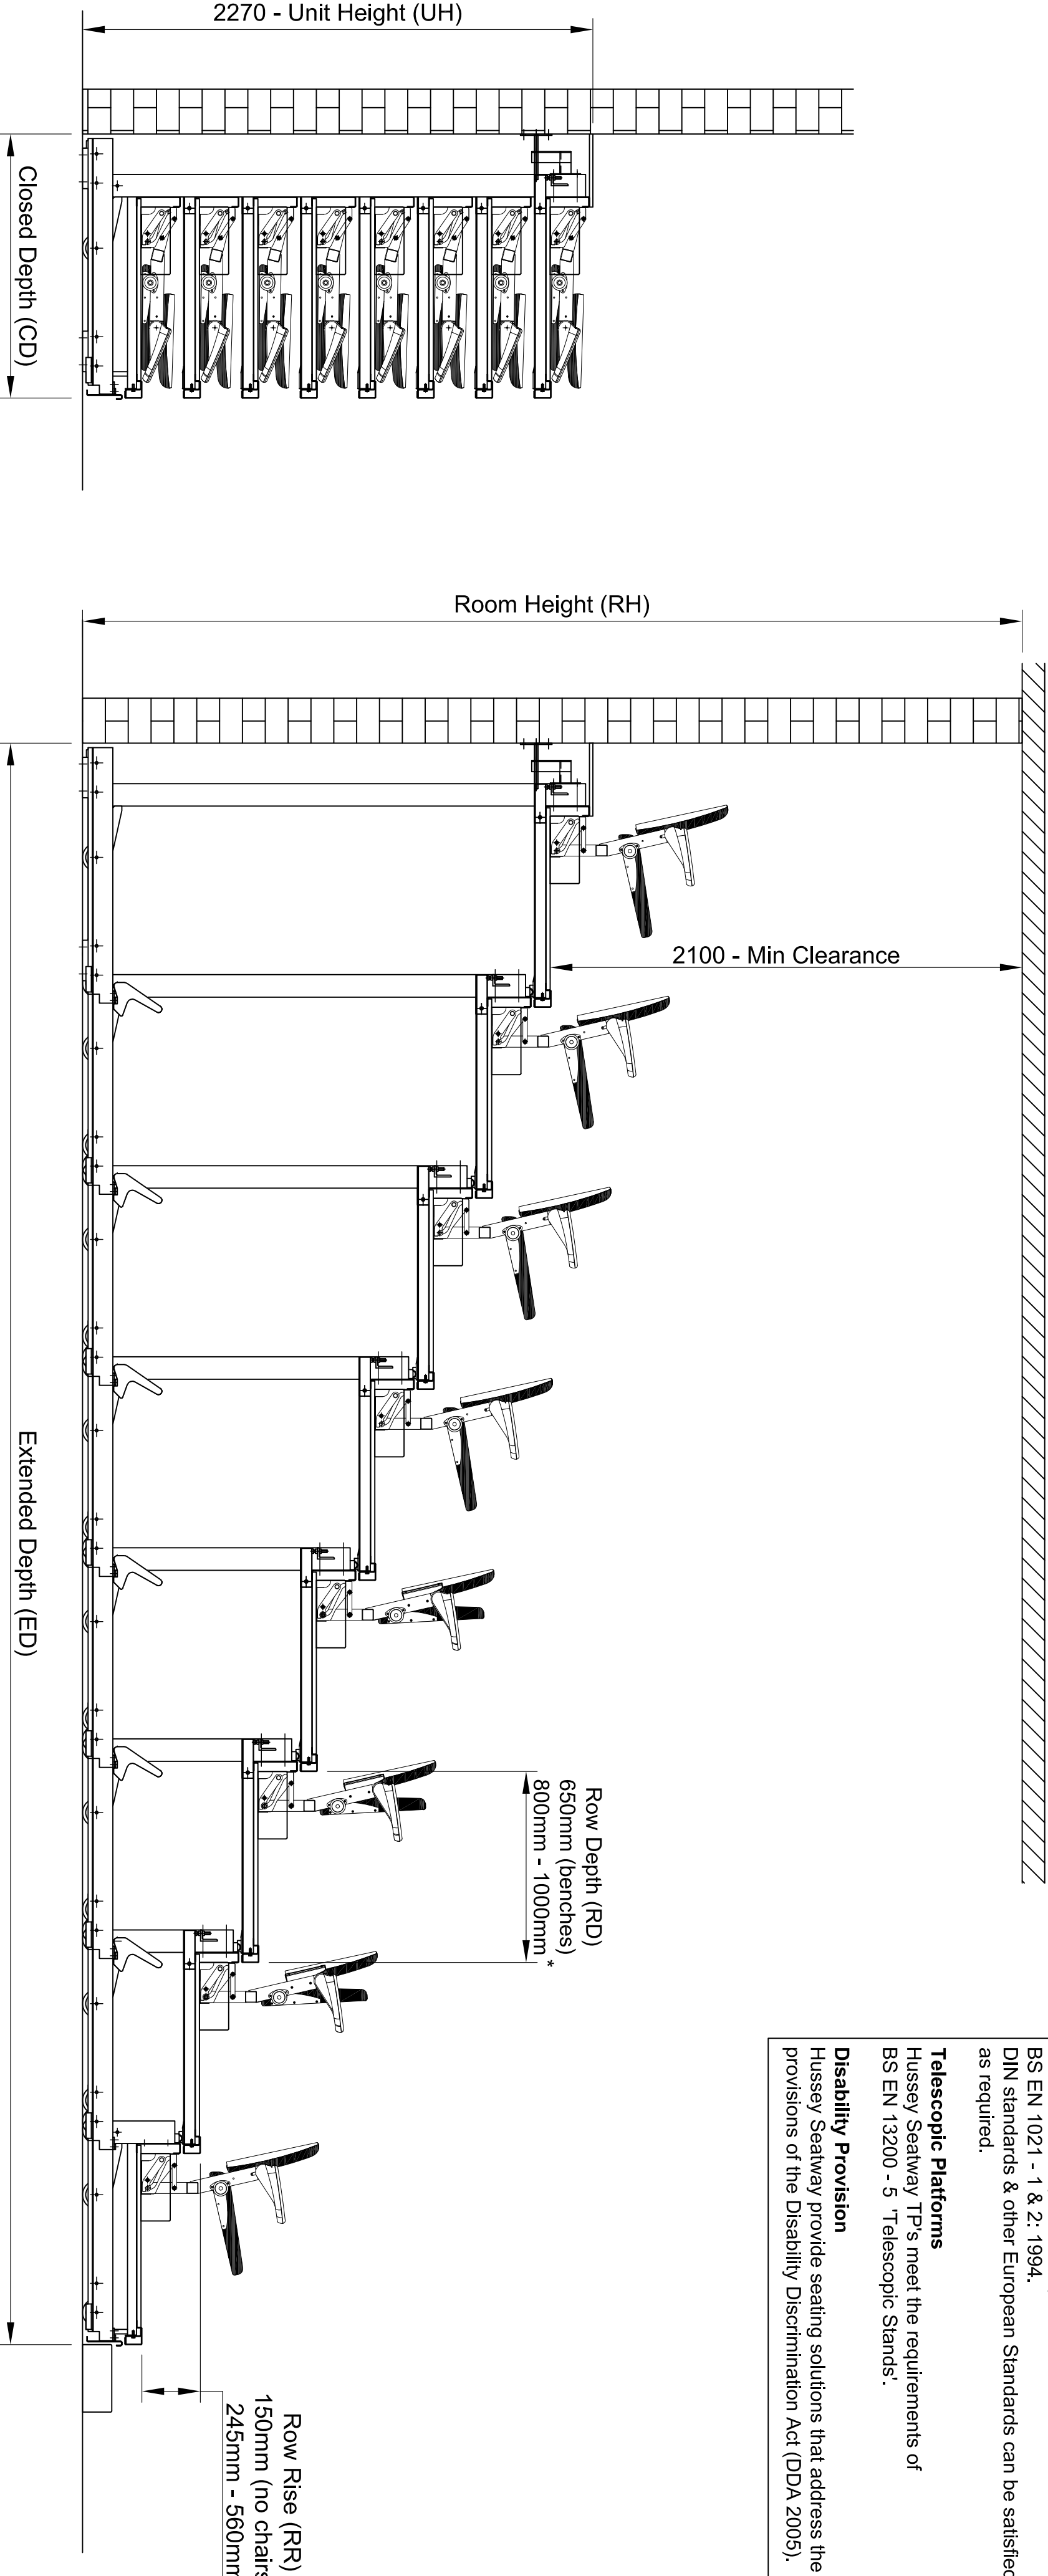

GENERAL TOLERANCE
+ 1 mm

Hussey

SEATWAY

PUBLIC SEATING SYSTEMS

THIS DRAWING IS THE PROPERTY AND COPYRIGHT OF HUSSEY SEATWAY LTD. COPYING OR REPRODUCTION WITHOUT WRITTEN PERMISSION IS PROHIBITED. © 2014

Tel: +44 (0)1985 847200
Fax: +44 (0)1985 847300
Email: info@husseyseatway.com

Itemref

Quantity

Title/Name, designation, material, dimension etc

Article No./Reference

TP Platforms

PRODUCT SPECIFICATION LAYOUT

Metric Version

A3 Scale 1:30